




CUSTOMER TERMINAL	RoHS	LEAD(Pb)--FREE
Sn 96%, Ag 4%	Yes	Yes

more than you expect



**ELECTRICAL SPECIFICATIONS @ 25° C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.38 ohms max.
D.C. RESISTANCE	4-6 @20°C	0.44 ohms max.
INDUCTANCE	1-2 100kHz, 100mV, Ls	180.00µH min.
DIELECTRIC	1-6 3125VAC, 1 second	2500VAC, 1 minute
URNS RATIO	(6-5):(1-2)	1.08:1
URNS RATIO	(6-5):(5-4)	1:1
URNS RATIO	(1-2):(2-3)	1:1

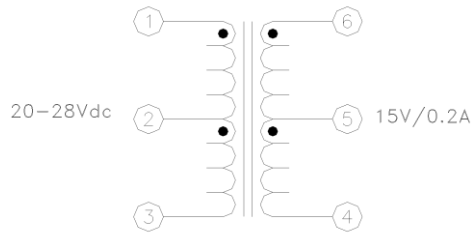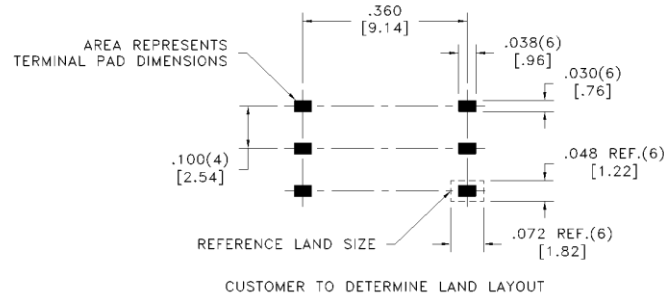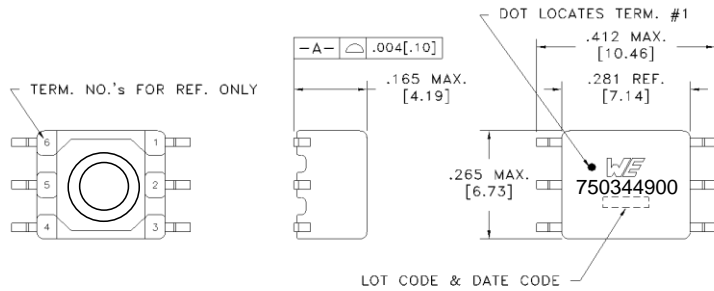

**GENERAL SPECIFICATIONS:**

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

VOLTAGE TIME: 13.4Vus

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability. Marking detail font and color may vary on preproduction samples.

DFM	Packaging Specifications	<p>CONVENTION PLACEMENT</p>	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.			
DATE	Method: Tape & Reel		Angles: ±1°			<p><b>TRANSFORMER</b></p>	<p><b>750344900</b></p>	
ENG	PKG-1055		Decimals: ±.005 [.13]					
REV.	02		Fractions: ±1/64					<p>This drawing is dual dimensioned. Dimensions in brackets are in millimeters.</p>
DATE	2021/8/5		Footprint: ±.005 [.13]					
www.we-online.com/midcom								
				SPECIFICATION SHEET 1 OF 1				